

PrivateGSM Professional Activation Wizard

Before you can start using PrivateGSM Professional you have to configure it by choosing *Automatic* or *Manual* configuration mode. Choosing *Automatic* mode PrivateGSM automatically creates an account on PrivateWave servers and bind your mobile phone number to it, so that your contacts can dial you using your mobile number instead of using a new line extension. If you choose *Manual* mode you will have to provide the SIP server host name and account credentials just like in the case of Enterprise edition.

In order to activate Automatic mode PrivateGSM sends an SMS to a PrivateWave UK's number, so be sure that your SIM is enabled to send international SMS. Since this feature is subject to additional costs related to sending an SMS, PrivateGSM asks to the user to confirm the action before proceeding with it.



With an automatic configuration, the application settings are not editable by the user. The user can see only a restricted set of the application settings. The application settings are fully editable only if the SIP account is manually configured.

BlackBerry

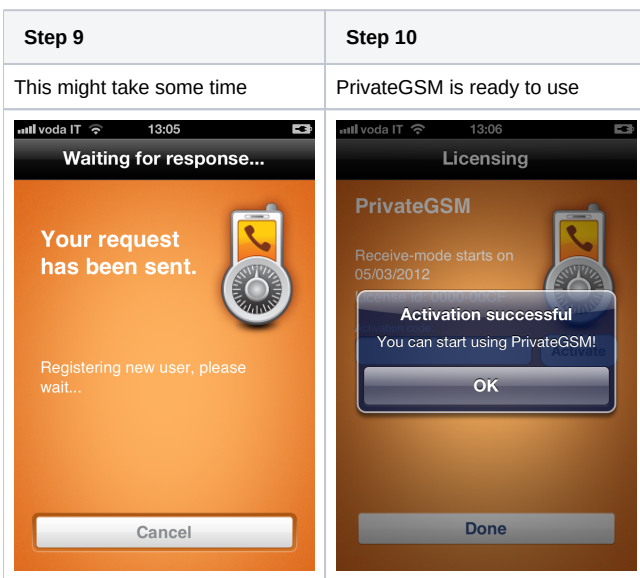
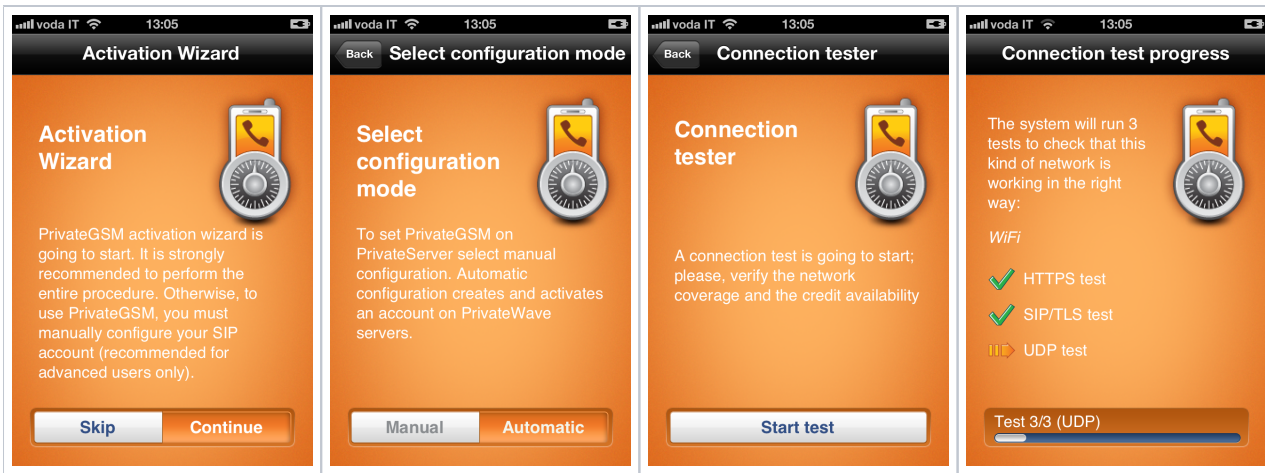
Start the Activation Wizard and select Automatic configuration. Before trying to configure your account, PrivateGSM will check your connection to internet. If the network is correctly configured, PrivateGSM will send an SMS to to a PrivateWave UK's number in order to automatically create and configure a SIP account. When the automatic configuration process is finished, PrivateGSM is ready to use

Step 1	Step 2	Step 3	Step 4
Start Activation Wizard	Select Automatic configuration	Start connection test	Connection te
PrivateGSM Activation Wizard PrivateGSM activation wizard is going to start. It is strongly recommended to perform the entire procedure. Otherwise, to use PrivateGSM, you must manually configure your SIP account (recommended for advanced users only). Continue Skip	PrivateGSM Activation Wizard To set PrivateGSM on PrivateServer select manual configuration. Automatic configuration creates and activates an account on PrivateWave servers. Manual Automatic	PrivateGSM Connection tester A connection test is going to start; please, verify the network coverage and the credit availability Start test	PrivateGSM Conn The system kind of netw DIRECT TCP rendezvous. ✓ Test 1/ ✓ Test 2/ ⏸ Test 3/
Step 5	Step 6	Step 7	Step 8
Connection test result	"Continue" to automatic configuration	Automatic configuration progress	PrivateGSM is
PrivateGSM Connection tester The network is now correctly configured. - Transport type: DIRECT TCP - Apn: ibox.tim.it WARNING: Check with your mobile carrier the Internet connection rates concerning these settings, to avoid extra or unexpected costs. By closing this procedure, the settings will not be saved. Continue	PrivateGSM Automatic configuration This version allows secure calls between mobile phones using the ZRTP protocol. PrivateGSM must be installed on both phones. Continuing the procedure an international SMS will be sent for setting up an account on PrivateWave servers. Continue Back	PrivateGSM Automatic configuration This version allows secure calls between mobile phones using the ZRTP protocol. PrivateGSM must be installed on both phones. Continuing the procedure an international SMS will be sent for setting up an account on PrivateWave servers. Back Self registration: Connecting...	PrivateGSM Dial : Invit Licen

iPhone

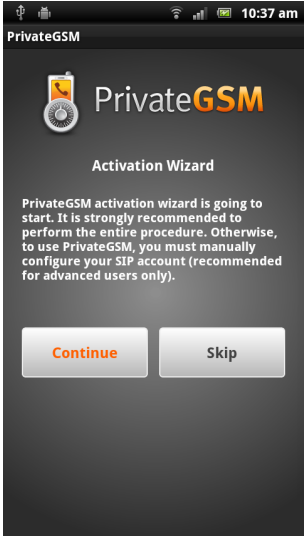
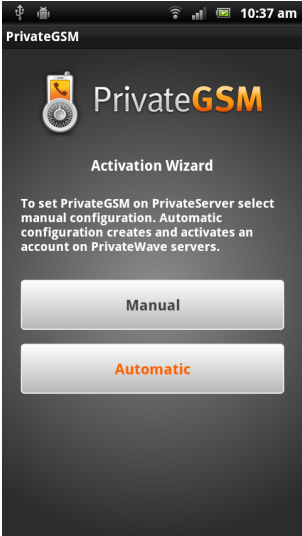
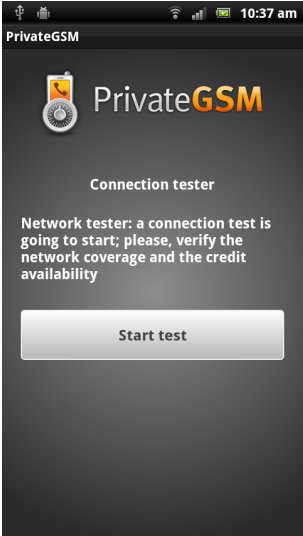
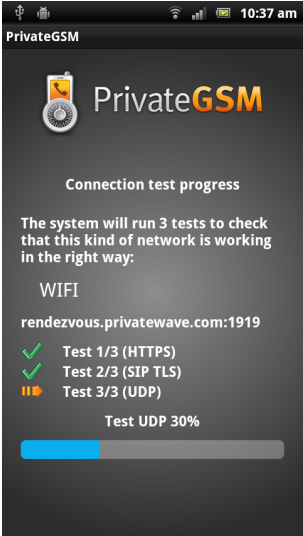
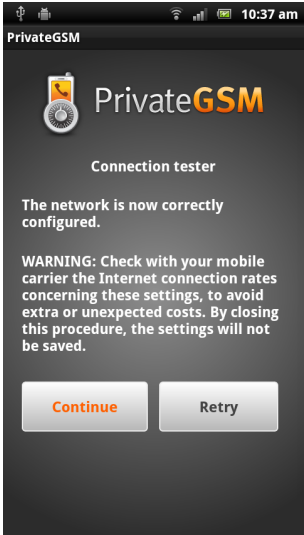
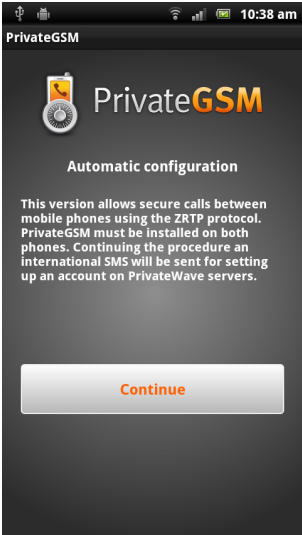
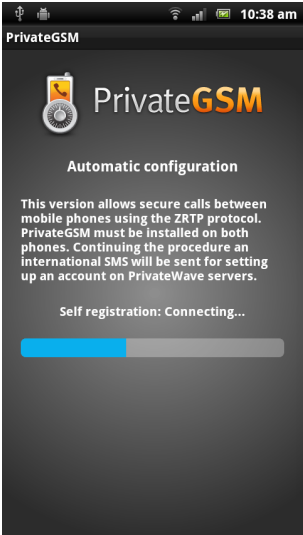
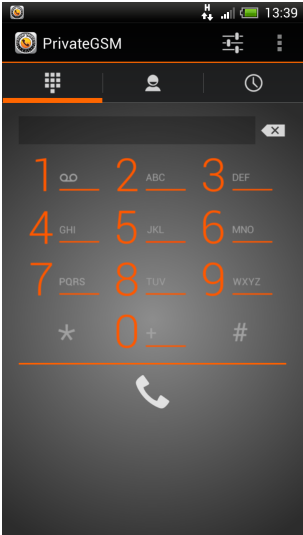
Start the Activation Wizard and select Automatic configuration. Before trying to configure your account, PrivateGSM will check your connection to internet. If the network is correctly configured, PrivateGSM will send an SMS to to a PrivateWave UK's number in order to automatically create and configure a SIP account. When the automatic configuration process is finished, PrivateGSM is ready to use

Step 1	Step 2	Step 3	Step 4
Continue to start the wizard	Choose "Automatic mode"	Start network tester	PrivateGSM tests the network



Android

Start the Activation Wizard and select Automatic configuration. Before trying to configure your account, PrivateGSM will check your connection to internet. If the network is correctly configured, PrivateGSM will send an SMS to to a PrivateWave UK's number in order to automatically create and configure a SIP account. When the automatic configuration process is finished, PrivateGSM is ready to use

Step 1	Step 2	Step 3	Step 4
Start Activation wizard	Select Automatic	Start connection test	Connection test progress
			
Step 5	Step 6	Step 7	Step 8
Connection test result	Tap on the "Continue" button	Configuration progress	PrivateGSM is ready
			

PrivateGSM Enterprise Activation Wizard

PrivateGSM - Automatic activation